


BMS-DP 250 Transmitter



DIFFERENTIAL PRESSURE TRANSMITTER



- + Zero and span calibration with single digital push button
- + NIST calibration available
- + Ranges and accuracy cover a wide range of applications
- + Cost effective and compact device suitable for OEM applications

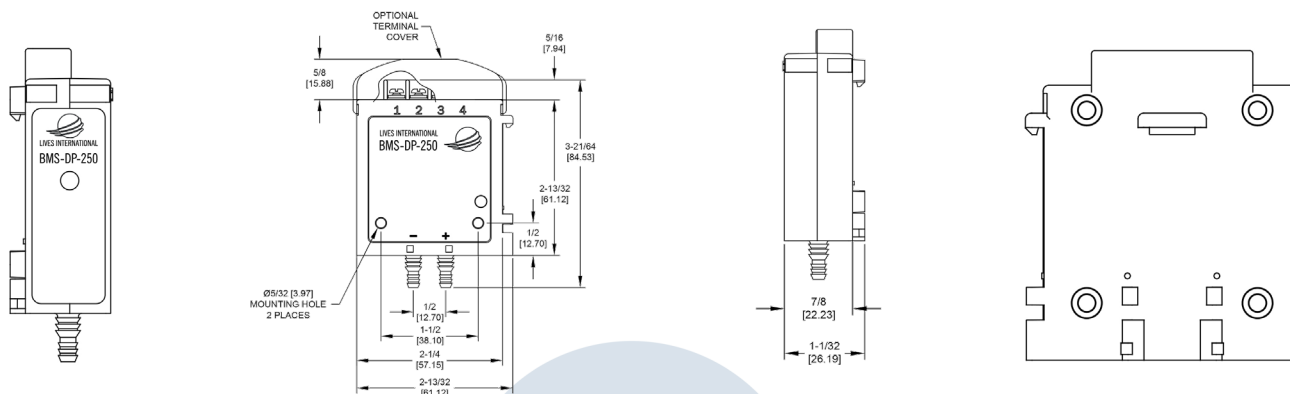

Range	0-250Pa
Accuracy	±1% Full scale
Power Requirements	10 - 35 VDC (2 wire) or 12-26 VAC (4 wire)
Output	4-20 mA
Weight	51g
Size (HxWxL)	93 x 62 x 27 mm
Process Connections	Barbed, dual size to fit 3 mm and 5 mm rubber or vinyl tubing.
Enclosure	IP20
Zero and Span Adjustments	Push button
Stability	±1% FS/year
Compensated Temperature Range	-5 to 50°C

Order Reference
BMS-DP-250