





GMP RF F 6R3V



Real Time Wireless Temperature Data Logger with
Flexible Sensor
-60°C to +85°C

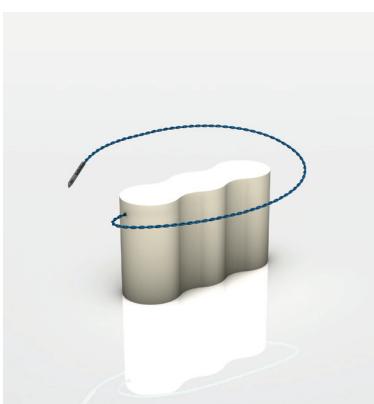

- + Collects and transmits real time temperature to XpertLog Software
- + ITS-90 calibration coefficients are stored in the internal memory
- + Complies with FDA 21 CFR Part 11
- + Network ready: multiple users, centralized, server database, active directory authentication
- + Calibration can be performed on site
- + Can be remotely activated

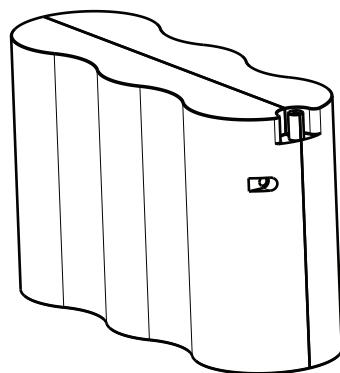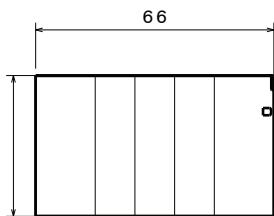

Sensor type

- flexible
- customized
- Sensor size
- cross section

4 wires thin, teflon
200 mm (7.87") or custom length
up to 5000 mm (195")
1.2 x 1.6 mm (0.05 x 0.06")
0.48 mm² (0.0007 inch²)

Operating Range

- body
- Sensor

-60°C to +85°C
-90°C to +140°C

Accuracy

Resolution

Memory capacity

Memory type

Sampling rate

Transmission

Internal clock drift

Mechanical

- material

- enclosure
- weight
- length
- width

- height

Power

Battery lifetime

Antenna

Wireless range

Radio frequency

Access point

Calibrations

Certification

$\pm 0.1^\circ\text{C}$ from -60°C to +85°C
0.01°C
32,000 data points
non volatile
1 sec to 24 hours
simultaneous: maximum 20 loggers
sequential: unlimited

-60°C to +85°C
-90°C to +140°C
 $\pm 0.1^\circ\text{C}$ from -60°C to +85°C
0.01°C
32,000 data points
non volatile
1 sec to 24 hours
simultaneous: maximum 20 loggers
sequential: unlimited

Peek 1000 - FDA compliant

Screws: 316L

IP-68

54 g (1.91 oz)

72 mm (2.84")

18 mm (0.70")

33 mm (1.3")

2 x Lithium batteries

user replaceable

Up to 4 months, based on usage

Internal

121 m (400 feet)

2.4 Ghz ISM band

USB to computer

Programs and reads unlimited number of loggers

Factory Calibrations: traceable NIST/COFRAC - ITS-90 coefficients stored in the internal memory

User Calibrations: closed loop calibration using XpertLog® software

Health Safety: EN 60950-1 / 2006

EN 60601-1-2 / 2007

EN 300440-2 v1.3.1 (2009-03)

Order Reference
GMP-RF-F-6R3V

Standard Calibration Points

- -60°C
- 0°C
- 85°C

Linxus International®



----->

XpertLog
software

----->

